


1208 KC3 NSK Self Aligning Ball Bearing

Bearing No. 1208

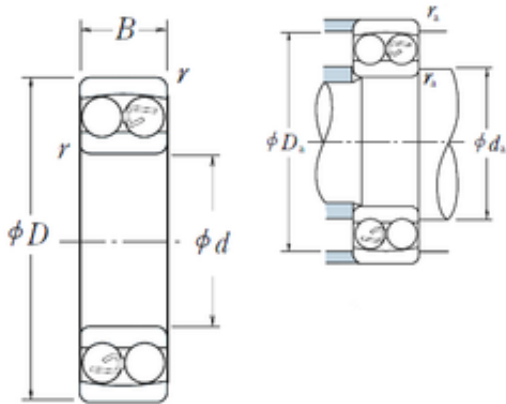

1208 Bearing 2D drawings and 3D CAD models

Size	40x80x18 mm
Bore Diameter	40 mm
Outer Diameter	80 mm
Width	18 mm
d	40 mm
D	80 mm
B	18 mm
C	18 mm
r min.	1,1 mm
da min.	46,5 mm
Da max.	73,5 mm
ra max.	1 mm
Weight	0,415 Kg
Basic dynamic load rating (C)	19,3 kN
Basic static load rating (C0)	6,5 kN
(Grease) Lubrication Speed	7 500 r/min
(Oil) Lubrication Speed	9 000 r/min
Calculation factor (e)	0,22
Calculation factor (Y0)	2,9
Calculation factor (Y2)	4,3
SRI	4.58
Y3	2.8
hidYobi	1208
LangID	1
PCD	60.2
D_	80



GGE Industrial Parts Services GmbH

Y2	4.3
SREX	0
cyl count	17
B_	18
hidTable	ecat_NSSAB
Oil rpm	9000
SRE	0
Y0	2.9
mass	0.415
ra	1
GRS rpm	7500
SRIX	0.04
groove inner	51.464
D_a	73.5
SRIN	0
C0	6.5
groove outer	69.6
SREN	0
X0	1
Prod_Type3	SABB_SA_CB
X1	1
da	46.5
X2	0.65
e	0.22
yobi	1208
r	1.1
KBRG	1352
CAng	8.503
cyl dia	8.731